

Welch®

**OEM, Industrial & Refrigeration Catalog
2005-2006**


**Refrigeration & Air Conditioning Manufacturing
Catalog Page 21**

ORDER ONLINE AT: www.cfpwarehouse.com or contact:

COMBINED FLUID PRODUCTS COMPANY
805 Oakwood Road, Lake Zurich, Illinois 60047
sales@combinedfluidproducts.com
www.combinedfluidproducts.com
Tel (847) 540-0054 Fax (847) 540-0513
(800) 521-2083

Refrigeration & Air Conditioning Manufacturing

Durability At The Deepest Vacuum

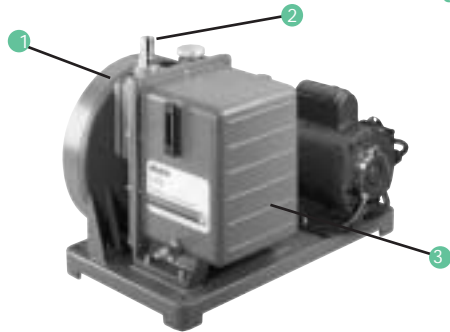

- 1 Low pump RPM ensures long service life
- 2 High efficiency pumping below 100 millitorr
- 3 Few moving parts increase pump durability


DUOSEAL® High Vacuum Pump

DUOSEAL belt-drive high vacuum pumps are known worldwide for durability and a long service. The key reason for the long life and high efficiency in pumping below 100 millitorr is the low pump RPM.

Note: 1. See pages 4-5 for more details.

Cat. No.	Description ¹
1400B-01	0.9 CFM (25 L/min), 0.1 micron Hg (1 x 10 ⁻⁴ Torr, 1.3 x 10 ⁻⁴ mbar) 115V, 60Hz, 1 Ph, accepts 7/16 in. tubing
1402B-01	5.6 CFM (160 L/min), 0.1 micron Hg (1 x 10 ⁻⁴ Torr, 1.3 x 10 ⁻⁴ mbar) 115V, 60Hz, 1 Ph, accepts 13/16 in. tubing
1376B-01	10.6 CFM (300 L/min), 0.1 micron Hg (1 x 10 ⁻⁴ Torr, 1.3 x 10 ⁻⁴ mbar) 115V, 60Hz, 1 Ph, accepts 13/16 in. tubing
1397B-01	17.7 CFM (500 L/min), 0.1 micron Hg (1 x 10 ⁻⁴ Torr, 1.3 x 10 ⁻⁴ mbar) 115V, 60Hz, 1 Ph, accepts 1-5/8 in. tubing

Note: 1. See pages 4-5 for more details.

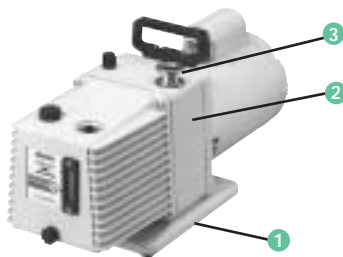

- 1 Small footprint
- 2 Built-in isolation device
- 3 ISO NW 25 inlet connection

Welch® Direct-Drive Vacuum Pump

Welch direct-drive high vacuum pumps are compact with high capacity to occupy small floor space. These pumps come with isolation devices integral to the pump to prevent oil and air contamination in the event of a power failure.

Cat. No.	Description ²
8917B-24	6.1 CFM (173 L/min), 0.1 micron Hg (1 x 10 ⁻⁴ Torr, 1.3 x 10 ⁻⁴ mbar) 115, 60Hz, 1 Ph, ISO NW 25 inlet fitting
8920B-24	7.7 CFM (218 L/min), 0.3 micron Hg (3 x 10 ⁻⁴ Torr, 4 x 10 ⁻⁴ mbar) 115V, 60Hz 1 Ph, ISO NW 25 inlet fitting
8925B-24	11.3 CFM (320 L/min), 0.4 micron Hg (4 x 10 ⁻⁴ Torr, 5.3 x 10 ⁻⁴ mbar) 115V, 60Hz 1 Ph, ISO NW 25 inlet fitting

Note: 2. See pages 2-3 for more details.

The A,B,C's of Vacuum Pump Selection			
	A	+	B = C
	Coil Size		Desired Vacuum = Flow Needed
Units	Ton		micron Hg(mbar) L/min
Residential AC	1.5		50(0.07)
	3		50(0.07)
Commercial Air Handling	5-10		500(0.7)
Appliance	0.5		300(0.4)
Leak Testing	1.5		500(0.7)